



TECHNICAL REPORT
NATICK/TR-90/019

AD A 218 626

ANALYSIS OF URBAN TERRAIN DATA FOR USE IN THE DEVELOPMENT OF AN URBAN CAMOUFLAGE PATTERN

BY
LISA B. HEPFINGER

FEBRUARY 1990

FINAL REPORT
JUNE 1987 - FEBRUARY 1989

TECHNICAL LIBRARY
U.S. ARMY NATICK RD&E CENTER
NATICK, MA 01760-5000

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED

UNITED STATES ARMY NATICK
RESEARCH, DEVELOPMENT AND ENGINEERING CENTER
NATICK, MASSACHUSETTS 01760-5000

INDIVIDUAL PROTECTION DIRECTORATE

DISCLAIMERS

The findings contained in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of trade names in this report does not constitute an official endorsement or approval of the use of such items.

DESTRUCTION NOTICE

For Classified Documents:

Follow the procedures in DoD 5200.22-M, Industrial Security Manual, Section II-19 or DoD 5200.1-R, Information Security Program Regulation, Chapter IX.

For Unclassified/Limited Distribution Documents:

Destroy by any method that prevents disclosure of contents or reconstruction of the document.

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION / AVAILABILITY OF REPORT Approved for Public Release. Distribution Unlimited.		
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
4. PERFORMING ORGANIZATION REPORT NUMBER(S) NATICK/TR-90/019			7a. NAME OF MONITORING ORGANIZATION		
6a. NAME OF PERFORMING ORGANIZATION U. S. Army Natick Research, Development & Engineering Center		6b. OFFICE SYMBOL (If applicable) STRNC-ITC	7b. ADDRESS (City, State, and ZIP Code)		
6c. ADDRESS (City, State, and ZIP Code) Natick, MA 01760-5019			9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER		
8a. NAME OF FUNDING / SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (If applicable)	10. SOURCE OF FUNDING NUMBERS		
8c. ADDRESS (City, State, and ZIP Code)			PROGRAM ELEMENT NO. 1L162786	PROJECT NO. AH98	TASK NO. WORK UNIT ACCESSION NO. AB029
11. TITLE (Include Security Classification) Analysis of Urban Terrain Data for Use in the Development of an Urban Camouflage Pattern					
12. PERSONAL AUTHOR(S) Lisa B. Hepfinger					
13a. TYPE OF REPORT Final		13b. TIME COVERED FROM 6/87 TO 2/89		14. DATE OF REPORT (Year, Month, Day) FEBRUARY 1990	15. PAGE COUNT 26
16. SUPPLEMENTARY NOTATION IPD-419					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	Camouflage	Color	Military Operations
			Terrains	Spectral Data	Spectrophotometric Data
			Patterns	Urban	Reflectance
19. ABSTRACT (Continue on reverse if necessary and identify by block number) Spectrophotometric data were obtained on 15 urban scenes, using Natick's Terrain Analysis System, for use in the development of an urban camouflage pattern. The data were classified into one of two categories: Type I scenes were of rubble piles; Type II scenes were of building walls. The elements of the scenes were found to vary over almost the entire lightness gamut, but concentrated in the red, orange, yellow and neutral regions of color space.					
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a. NAME OF RESPONSIBLE INDIVIDUAL Lisa B. Hepfinger			22b. TELEPHONE (Include Area Code) 508-651-5146	22c. OFFICE SYMBOL STRNC-ITC	

PREFACE

The data for this report were collected by investigators from the U.S. Army Natick Research, Development and Engineering Center from June through September 1987. This report describes urban scene colorimetric data obtained with the Natick Terrain Analysis System for use in the development of an urban camouflage pattern. These were evaluated by the Individual Protection Directorate (IPD), Natick under project No. 1L162786AH98AB029.

ACKNOWLEDGMENTS

The author would like to thank Louis J. Dittami and Elizabeth S. McCoy of the U.S. Army Natick Research, Development and Engineering Center for their assistance in collecting the terrain data for this study. This study would not have been possible without Mr. Dittami's experience in the operation of the Terrain Analysis System and his helpful comments during the writing of this report.

TABLE OF CONTENTS

	Page
Preface	iii
Acknowledgments	iii
List of Illustrations	v
Introduction	1
Procedure	1
Results	1
Discussion	4
Conclusions	12
References	14
Appendix A - Beta 4 Values for the Scenes	16
Appendix B - Optimum Number of Domains for each Scene	17
Appendix C - Munsell Color Notations for Scenes	19

LIST OF ILLUSTRATIONS

Figure	Page
1. Plot of Beta 4 vs. Number of Domains to Determine the Optimum Number of Domains Needed to Describe Scene 835. (Domains = picture elements (pixels) grouped by color.)	3
2. Plot of a* (redness/greenness) vs. b* (yellowness/blueness) of the Domains for All of the Urban Scenes. (Domains = picture elements (pixels) grouped by color.)	6
3. Plot of b* (yellowness/blueness) vs. L* (lightness) of the Domains for All of the Urban Scenes. (Domains = picture elements (pixels) grouped by color.)	7
4. Plot of a* (redness/greenness) vs. b* (yellowness/blueness) of the Domains for the Type I Urban Scenes. (Domains = picture elements (pixels) grouped by color.)	8
5. Plot of b* (yellowness/blueness) vs. L* (lightness) of the Domains for the Type I Urban Scenes. (Domains = picture elements (pixels) grouped by color.)	9
6. Plot of a* (redness/greenness) vs. b* (yellowness/blueness) of the Domains for the Type II Urban Scenes. (Domains = picture elements (pixels) grouped by color.)	10
7. Plot of b* (yellowness/blueness) vs. L* (lightness) of the Domains for the Type II Urban Scenes. (Domains = picture elements grouped by color.)	11
Table	
1. Summary of Scenes Filmed for Urban Camouflage Study.	2
2. Optimum Number of Domains Separated by Type.	4
3. Selected CIELAB Values for All Urban Scenes.	5
4. Selected CIELAB Values for Type I Urban Scenes.	12
5. Selected CIELAB Values for Type II Urban Scenes.	12

ANALYSIS OF URBAN TERRAIN DATA FOR USE IN THE DEVELOPMENT OF AN URBAN CAMOUFLAGE PATTERN

Introduction

Natick's Terrain Analysis System (TAS) was developed to satisfy the need for a scientific method to objectively design camouflage patterns and colorations, based on actual terrain reflectance data. The TAS is capable of obtaining spectrophotometric data on a given scene, and processing the data down to the most predominant colors in the scene. This data can then be used to determine the appropriate colors and pattern for camouflage use in that terrain. Data can be obtained in the visible and near-infrared regions of the electromagnetic spectrum. The development of urban camouflage is the first such effort to utilize the capabilities of the TAS.

The character of urban terrain varies greatly, even within a city or town^{1,2}. The terrain is largely man-made and is multidimensional in structure and color. During Military Operations in Urbanized Terrain (MOUT), many structures are partially or totally demolished. The resulting terrain becomes even more complex with this accumulating rubble, and standard camouflage patterns are not as effective.

The TAS has been used to obtain data on various urban scenes, in order to provide improved camouflage protection for the individual soldier in urban areas. This report documents the scenes filmed and the data obtained in this study.

Procedure

Data was obtained by the TAS using the established data collection techniques^{3,4}. Table 1 lists the scenes filmed and a short description of each one. Both rubble piles and building walls were included in the data collection. Scenes of rubble piles are designated as Type I, and scenes of building walls are Type II.

Results

Each scene was subjected to a clustering procedure which groups picture

Table 1. Summary of Scenes Filmed for Urban Camouflage Study

<u>Scene #</u>	<u>Location</u>	<u>Description</u>	<u>Type</u>
705	Natick, MA	Rubble Pile	I
760	Framingham, MA	Bancroft Building - Greyish brown stucco	II
765	Framingham, MA	Bancroft Building - Cinder blocks	II
780	Ft. Benning, GA	MOU Village - Building	II
785	Ft. Benning, GA	MOU Village - Building	II
790	Ft. Benning, GA	MOU Village - Building - Painted cinder block wall	II
795	Natick, MA	Rubble Pile	I
800	Natick, MA	Brick Building	II
825	Fall River, MA	Concrete Rubble Pile	I
830	Fall River, MA	Concrete Rubble Pile	I
835	Fall River, MA	Wood Rubble Pile	I
840	Fall River, MA	Brick Rubble Pile	I
843	Fall River, MA	Brick Rubble Pile	I
845	Fall River, MA	Rusty Metal Rubble Pile	I
850	Fall River, MA	Metal, Concrete and Wood Rubble Pile	I

elements (pixels) in that scene together based on their color. These groups are called domains. The optimum number of domains needed to describe each scene was determined using the methodology developed by Natick in conjunction with Decilog, Inc. of Melville, NY⁵. This method uses the calculated ratio of the between domain variance to the within domain variance, called Beta 4. The critical value at which the domains account for 90% of the total variance is taken from a Table of Critical Values of F, at the 90% level with n-1 degrees of freedom, where n is the number of domains⁶. The minimum number of domains needed is determined by plotting the Beta 4 values as in Figure 1.

In Figure 1, the F values are illustrated by the squares, and the x's represent the Beta 4 values calculated for Scene 835. The crossover for the two curves occurs between 4 and 5 domains. The number of domains needed is the next higher integral number from the crossover, or in this case, five domains. Appendix A contains the Beta 4 values for each of the scenes, and Appendix B lists the optimum number of domains found for each scene using this method. Appendix B also contains the 1976 International Commission on Illumination (CIE) L*a*b* (CIELAB)⁷ values (using D₆₅ and the 10 degree standard observer) and the percentage of the scene included by each domain. Appendix C contains the Munsell Notation for each domain, based on the CIELAB values contained in Appendix B, to give the reader an idea of the appearance of the

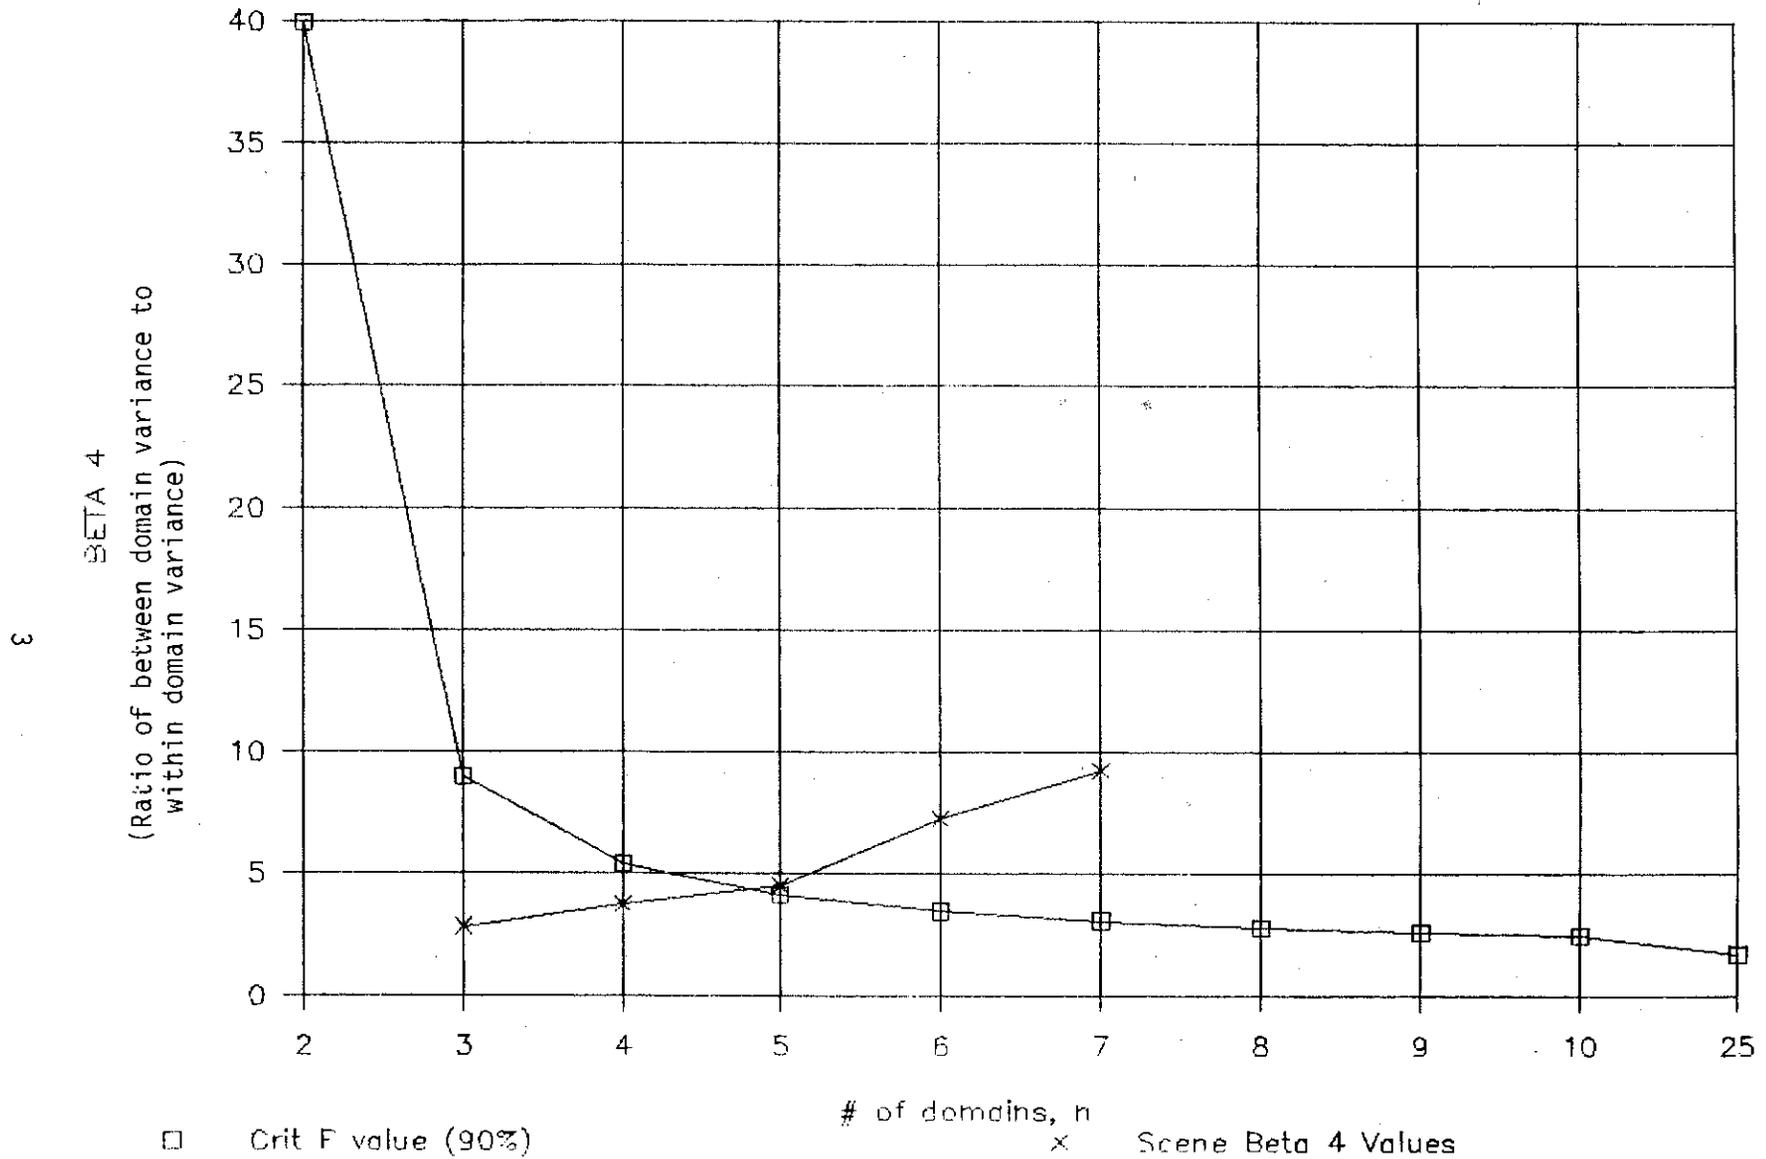


Figure 1. Plot of Beta 4 vs. Number of Domains to Determine the Optimum Number of Domains Needed to Describe Scene 835. (Domains = picture elements (pixels) grouped by color.)

colors represented by the CIELAB values⁸. Table 2 is a summary version of Appendix B. Tables 3 to 5 contain selected CIELAB values from Appendix B.

Discussion

As indicated in Table 2, 4 to 8 domains are needed to define the various scenes. Type I has an average of 6.1 domains, and Type II is 5.5. In many cases, more domains are needed than the software can display (5 is the maximum). This is due to the large variability of building materials and colors that can be used in an urban environment, compared to the number of colors to be found in a typical woodland scene. In many of the scenes, the percentage of the scene occupied by a given domain is small (< 10%). In comparison, the smallest area of the Woodland camouflage pattern, Black 357, comprises 16% of the pattern.

As a measure of the variability of the colors in each scene, the mean color difference from the mean⁹ (MCDM) was determined for the domains in each scene. The MCDM is calculated by determining the color difference for each

Table 2. Optimum Number of Domains Separated by Type

<u>Scene #</u>	<u>Type</u>	<u># of Domains^a</u>	<u>MCDM^b</u>
705	I (Rubble)	8	10.13
795	I	5	12.29
825	I	7	11.22
830	I	4	14.66
835	I	5	15.64
840	I	6	9.54
843	I	7	10.93
845	I	7	12.25
850	I	6	10.95
AVERAGE		6.1	11.96
STANDARD DEVIATION		1.2	1.91
760	II (Building)	5	3.53
765	II	6	4.33
780	II	4	5.12
785	II	4	2.33
790	II	6	1.74
800	II	8	2.44
AVERAGE		5.5	3.25
STANDARD DEVIATION		1.4	1.19

^a Picture elements (pixel) grouped by color
^b Mean Color Difference from Mean

domain in the scene against the mean CIELAB values for all of the domains in the scene. These color differences are then averaged and called the MCDM. They provide a measure of the variation in the scene and are reported in Table 2. The larger the MCDM, the larger the color difference is between the various colors in the scene. As a point of reference, the MCDM for the standard Woodland pattern colors is 10.50. When the color differences for textile acceptability of 16 monotone shades and their limit samples were examined, the average color difference from the standard ranged from 0.32 to 2.4610. The Type II scenes show much less variation in color than the Type I scenes, as expected for the more uniform building facades. Although a large number of domains are necessary to describe these scenes (4 to 8 domains), the color differences between the various domains is small. The MCDM's for the Type I scenes are much larger and of the same order of magnitude as the Woodland pattern.

Figure 2 is an a^* vs. b^* plot of all of the domains, and Figure 3 is an L^* vs. b^* plot. L^* is a measure of lightness, a^* is a measure of the redness (positive axis) or greenness (negative axis), and b^* is a measure of the yellowness (positive axis) or blueness (negative axis). The minimum, maximum, average and weighted average (by percentage of total pixels assigned) CIELAB values for all of the domains are listed in Table 3. Figures 4 to 7 and Tables 4 to 5 contain similar information for the domains separated by scene type (I or II). The Type I scenes vary over almost the entire lightness gamut (an L^* of 0.0 corresponds to black and 100.0 to white) and the Type II scenes over a slightly smaller range. Most of the points for both types fall within the red, orange, yellow and neutral regions of color space.

Table 3. Selected CIELAB Values for All Urban Scenes.

	L^* ^a	a^* ^b	b^* ^c
Minimum	8.04	-7.04	-8.87
Maximum	95.81	22.63	41.03
Average	52.28	5.93	15.14
<u>Weighted Average</u>	50.42	6.54	14.15

- ^a L^* = Lightness (0 = black, 100 = white)
^b a^* = Redness (positive) or greenness (negative)
^c b^* = Yellowness (positive) or blueness (negative)

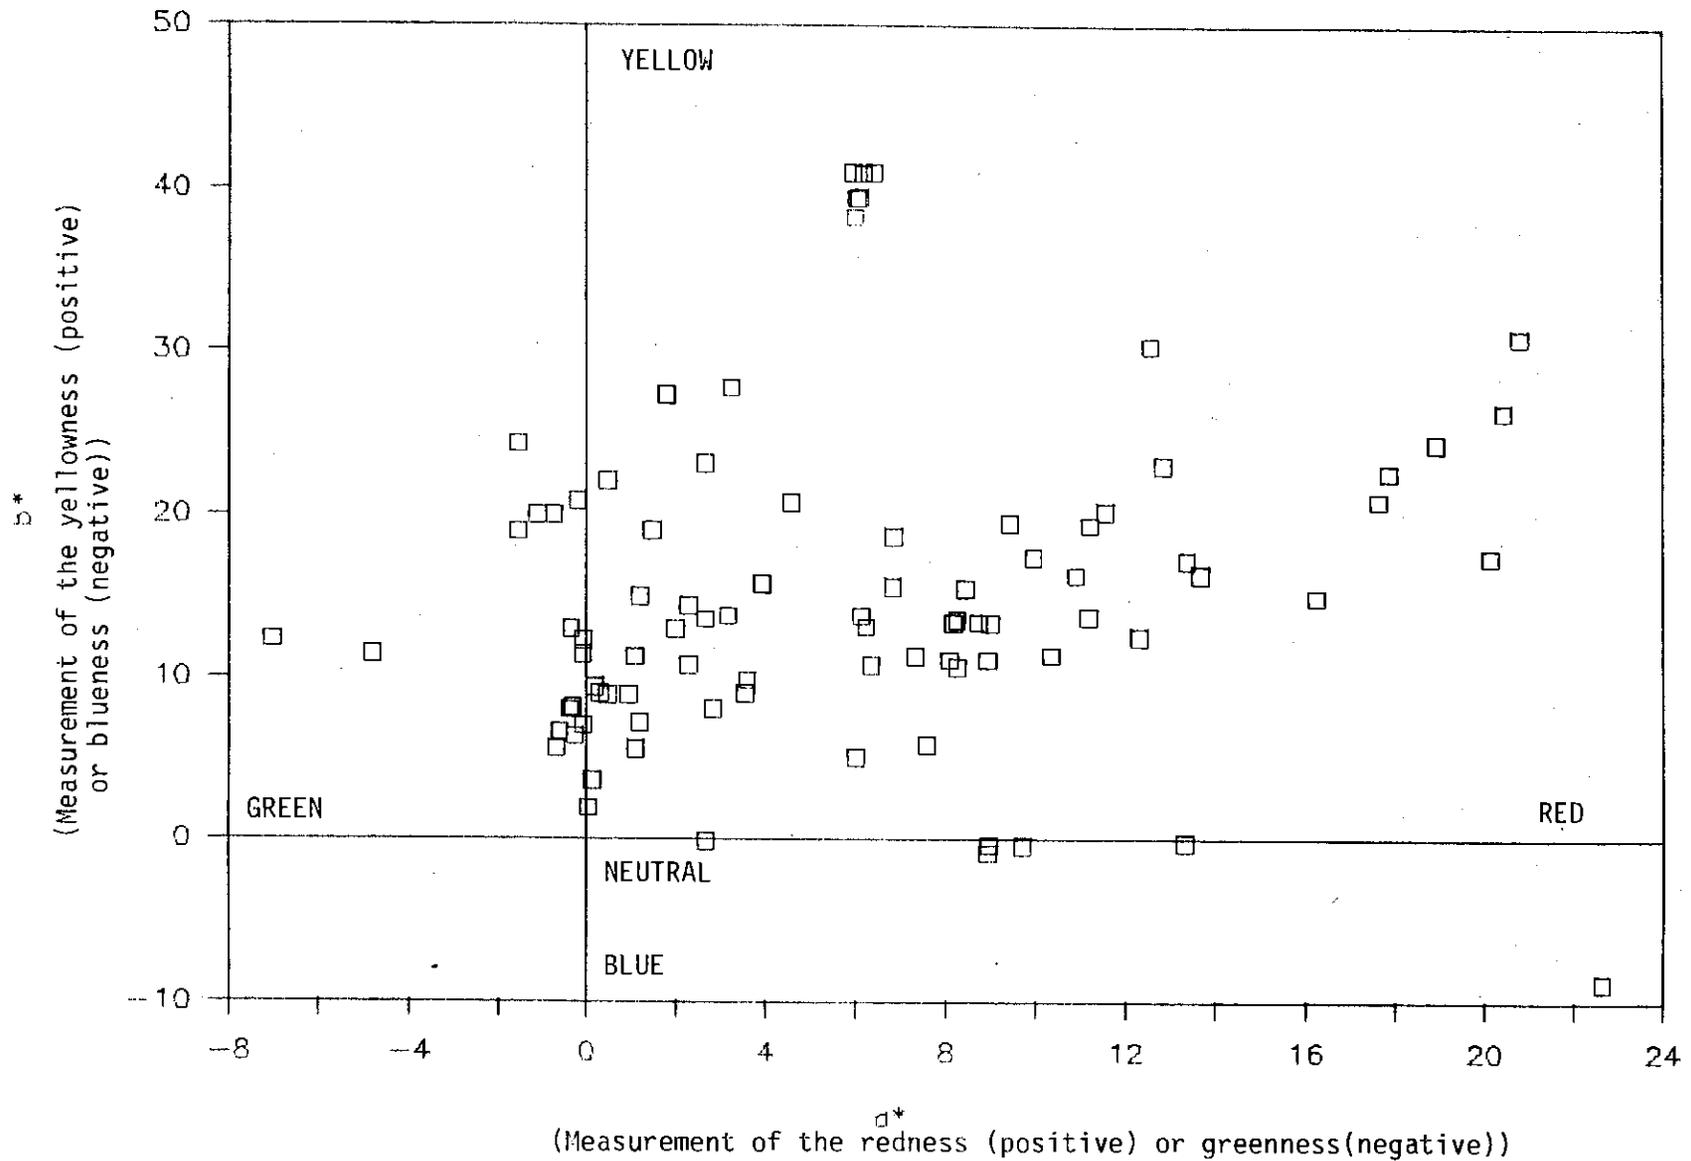


Figure 2. Plot of a^* (redness/greenness) vs. b^* (yellowness/blueness) of the Domains for All of the Urban Scenes. (Domains = picture elements (pixels) grouped by color.)


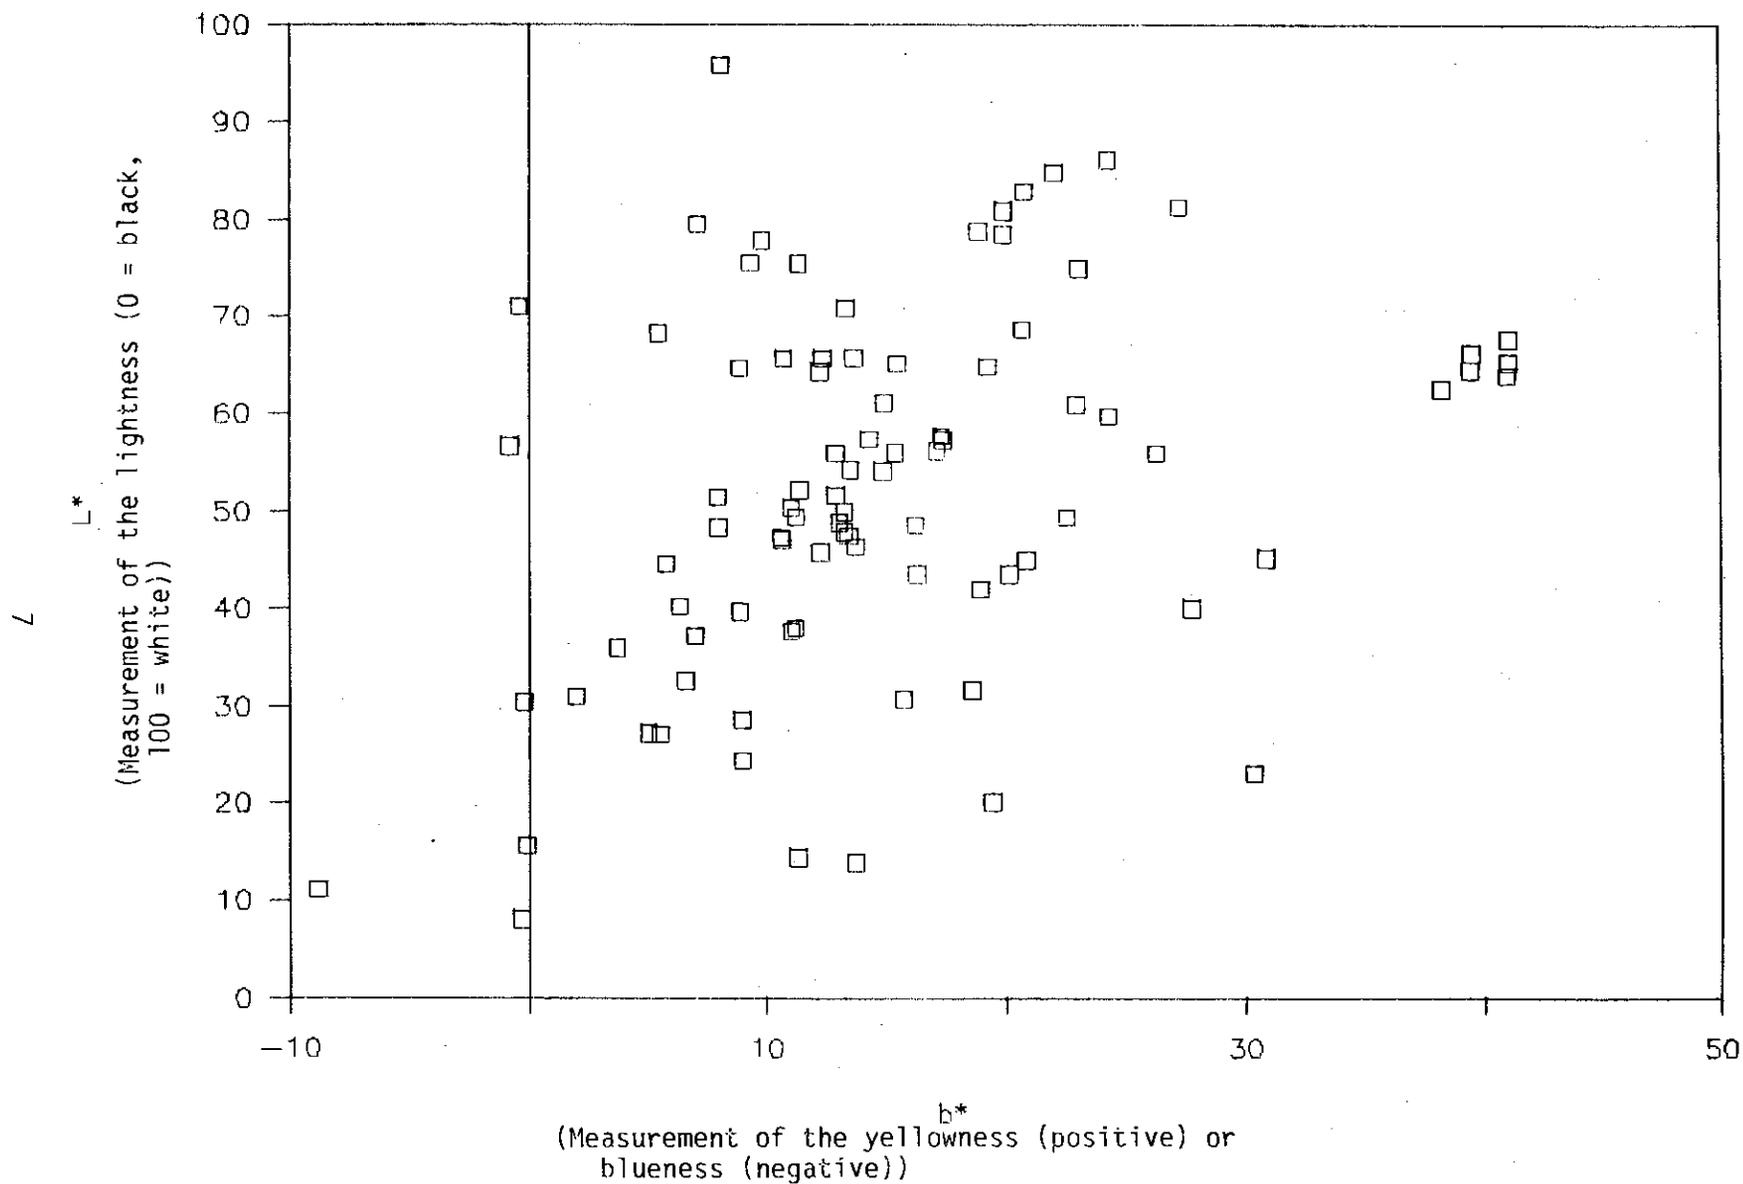


Figure 3. Plot of b^* (yellowness/blueness) vs. L^* (lightness) of the Domains for All of the Urban Scenes. (Domains = picture elements (pixels) grouped by color.)

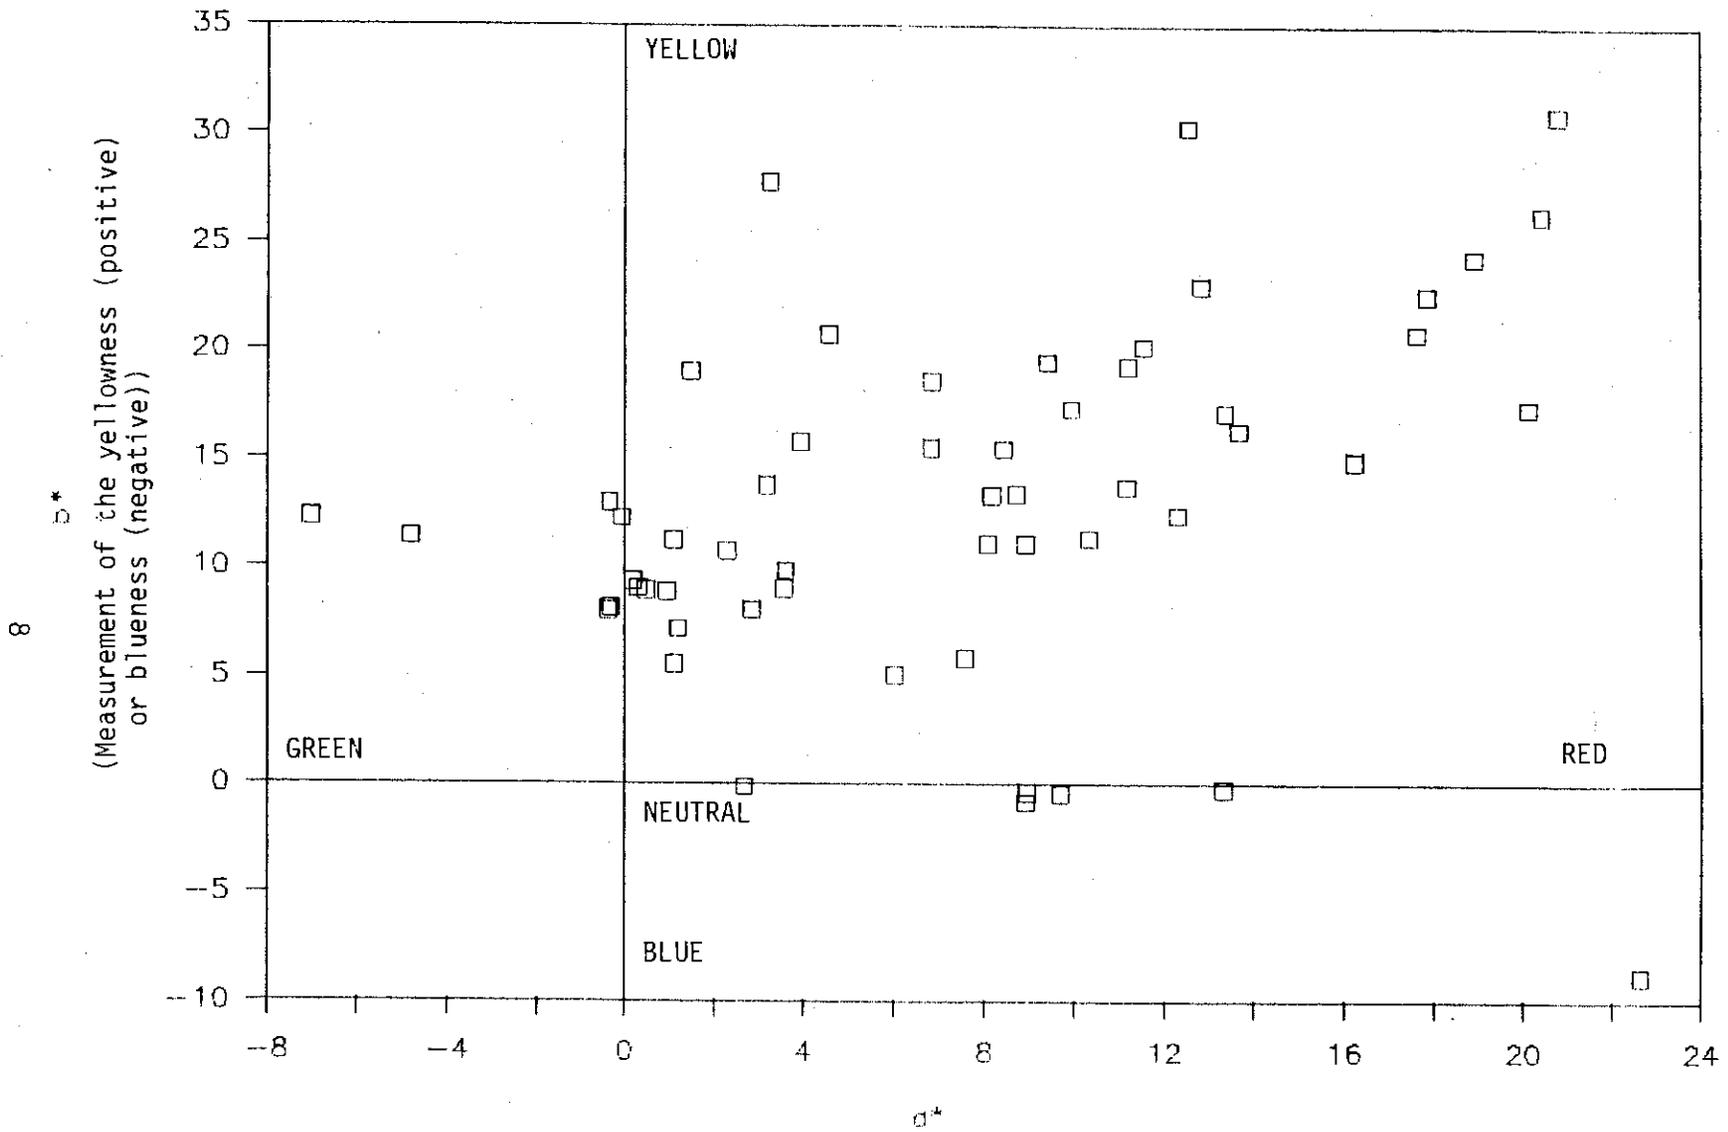

(Measurement of the redness (positive) or greenness(negative))

Figure 4. Plot of a^* (redness/greenness) vs. b^* (yellowness/blueness) of the Domains for the Type I Urban Scenes. (Domains = picture elements (pixels) grouped by color.)

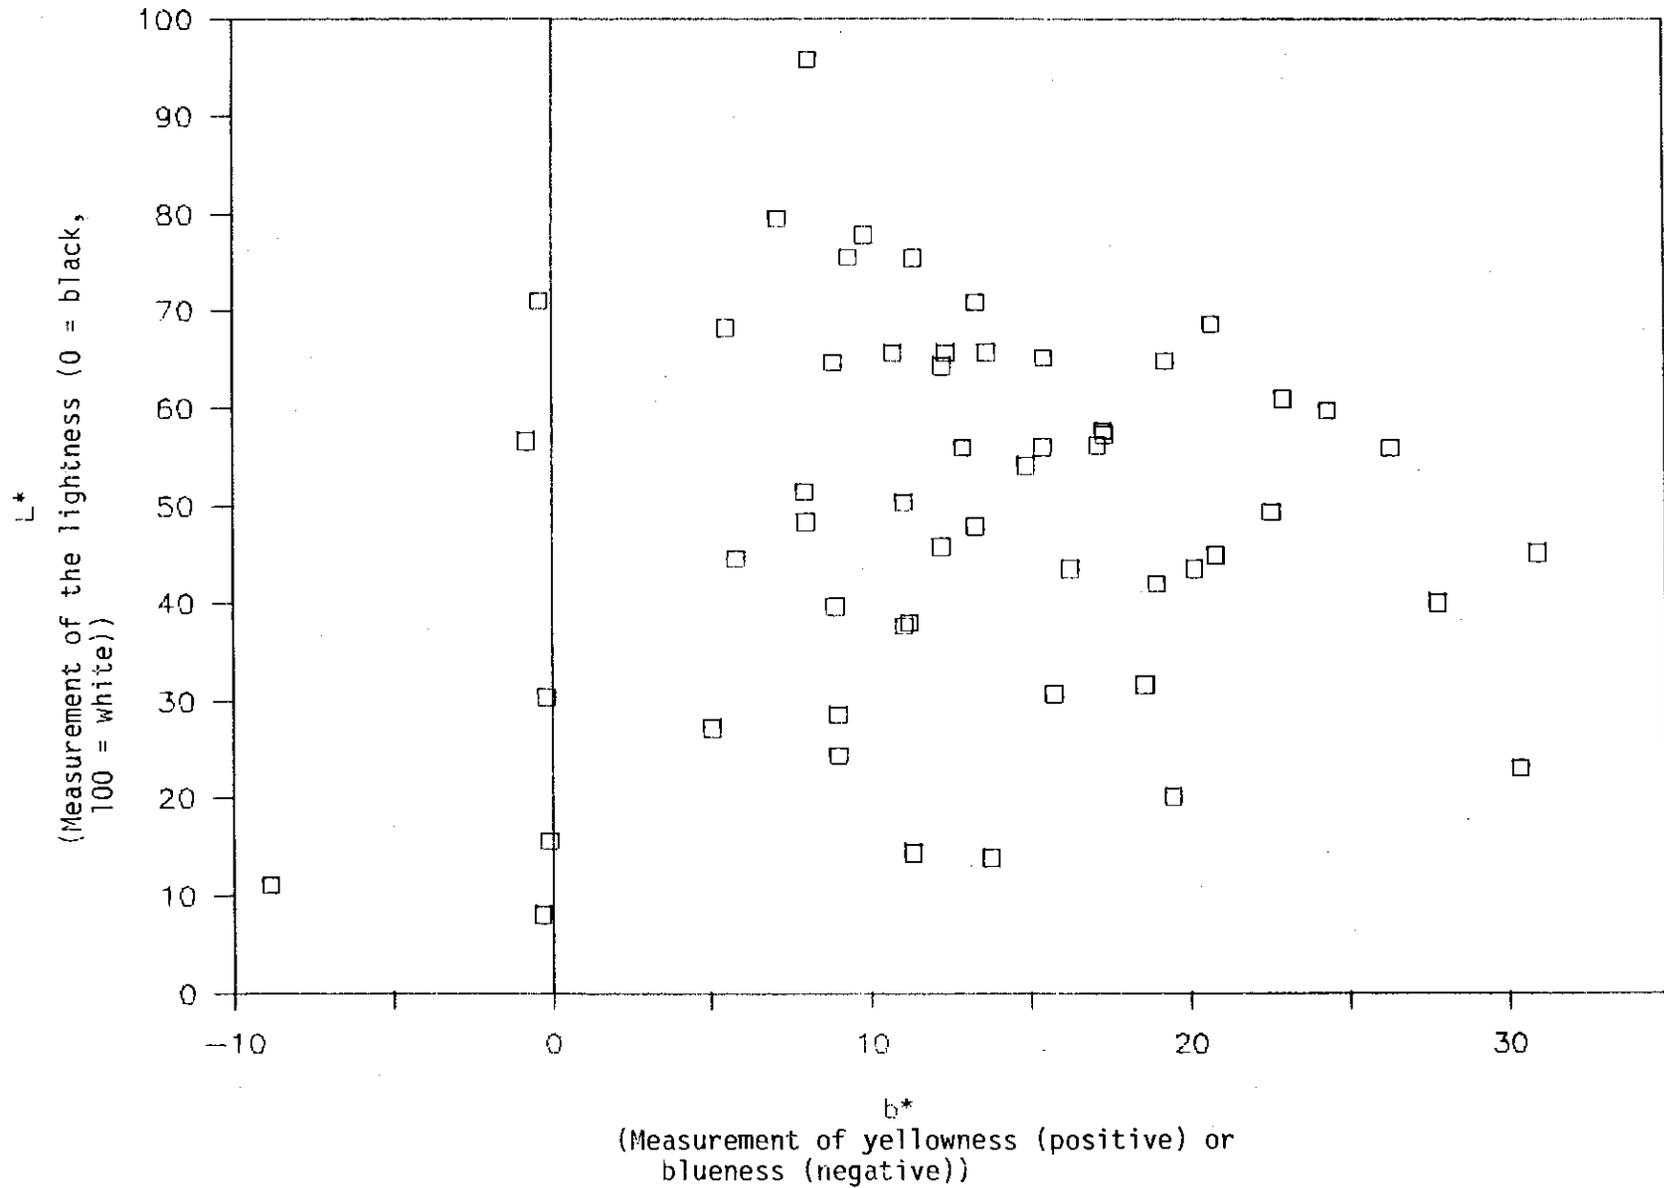


Figure 5. Plot of b^* (yellowness/blueness) vs. L^* (lightness) of the Domains for the Type I Urban Scenes. (Domains = picture elements (pixels) grouped by color.)

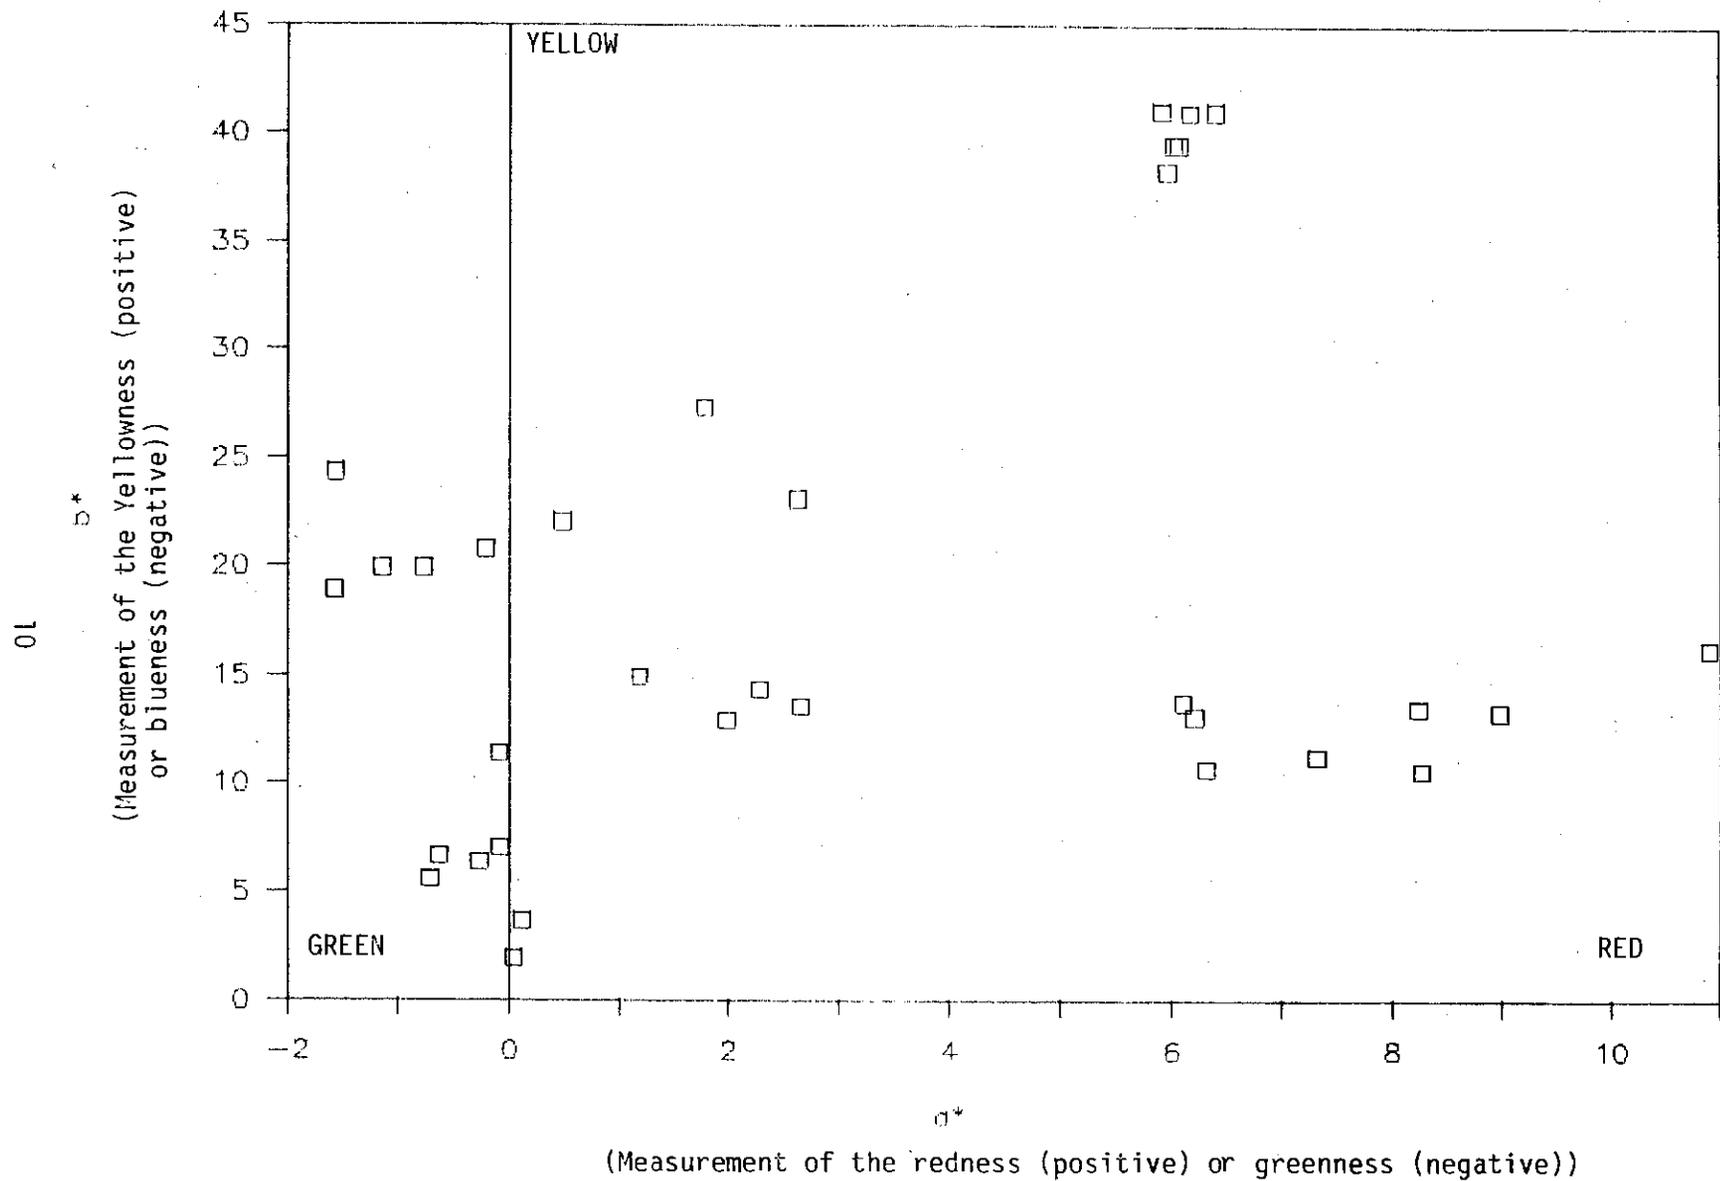


Figure 6. Plot of a^* (redness/greenness) vs. b^* (yellowness/blueness) of the Domains for the Type II Urban Scenes. (Domains = picture elements (pixels) grouped by color.)

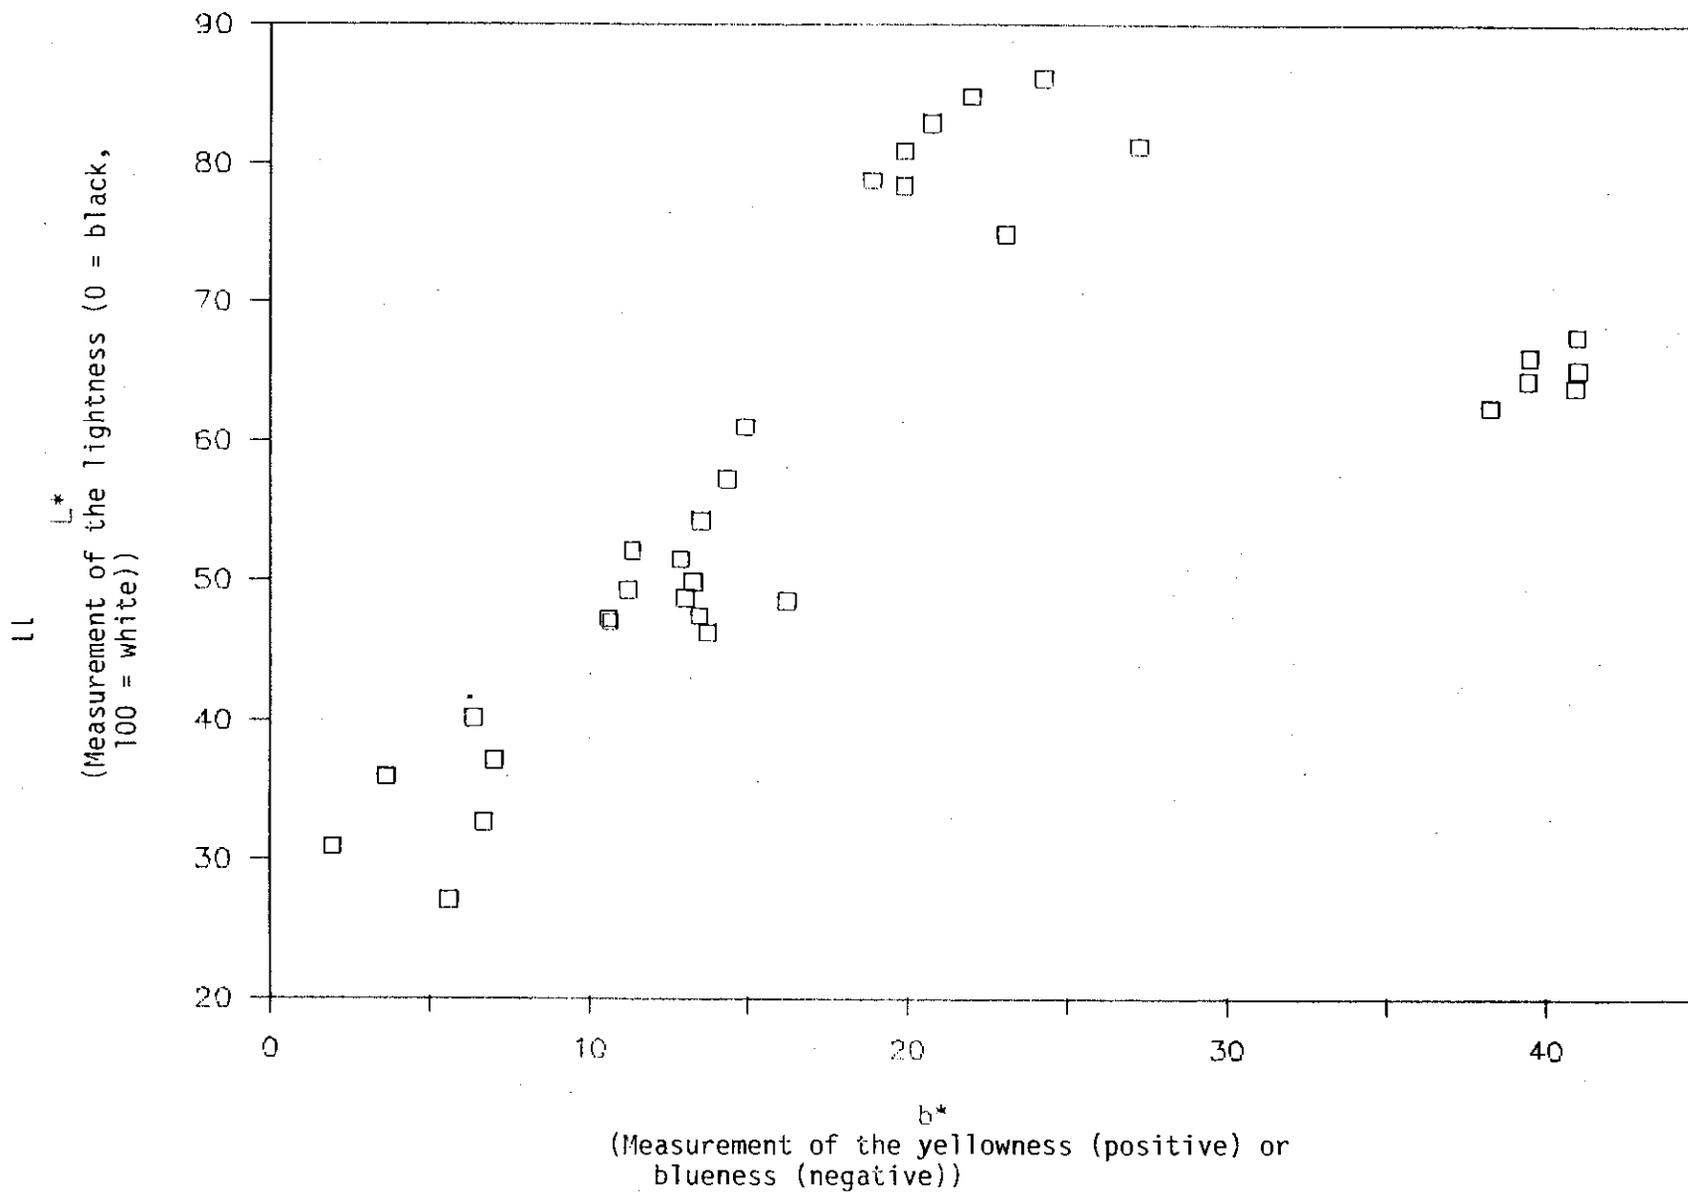


Figure 7. Plot of b^* (yellowness/blueness) vs. L^* (lightness) of the Domains for the Type II Urban Scenes. (Domains = picture elements (pixels) grouped by color.)

Table 4. Selected CIELAB Values for Type I Urban Scenes.

	<u>L*^a</u>	<u>a*^b</u>	<u>b*^c</u>
Minimum	8.04	-7.04	-8.87
Maximum	95.81	22.63	30.90
Average	49.06	7.57	13.00
<u>Weighted Average</u>	46.99	8.12	12.14

^a L* = Lightness (0 = black, 100 = white)

^b a* = Redness (positive) or greenness (negative)

^c b* = Yellowness (positive) or blueness (negative)

Table 5. Selected CIELAB Values for Type II Urban Scenes.

	<u>L*^a</u>	<u>a*^b</u>	<u>b*^c</u>
Minimum	27.06	-1.58	1.93
Maximum	86.11	10.89	41.03
Average	57.64	3.18	18.70
<u>Weighted Average</u>	59.10	2.51	19.25

^a L* = Lightness (0 = black, 100 = white)

^b a* = Redness (positive) or greenness (negative)

^c b* = Yellowness (positive) or blueness (negative)

Conclusions

The collected terrain data, along with other data, were used in the development of candidate urban camouflage patterns. The elements of a camouflage pattern must be discernible to be effective. If the various elements of the pattern are too small (<10% of the pattern) or too close in color to other elements in the pattern (< approximately 2.5 CIELAB units), the pattern will quickly merge to a monotone. While 4 to 8 domains may be necessary to define the background scene, a smaller number of domains may be acceptable to define an effective camouflage pattern for use in that type of scene.

An additional factor to be considered in determining the number of colors to use in a camouflage print is the number of colors that can be readily controlled by industry in a production environment. For each shade in a pattern, a standard and color tolerance must be established and maintained for procurement purposes. Also, many shades require infrared spectral tolerances, so the various camouflage elements in the pattern must be large enough to be measured spectrophotometrically (greater than approximately 1" in diameter). A

compromise must be reached between the number of colors necessary for effective camouflage and what can be produced by industry in quantity and at a reasonable cost. Another requirement is for a single pattern that can be used in both the Type I and Type II terrains.

While the Terrain Analysis System can help to identify colors and patterns for use in a particular type of terrain, a human observer must still make the final judgement as to how many colors will provide a good representation for camouflage purposes. The terrain data can then be clustered to the number of domains desired and a pattern produced for further testing.

References

1. Military Operations on Urbanized Terrain Training, TC 90-1, June, 1986, page C-8.
2. An Infantryman's Guide to Urban Combat, FM 90-10-1, September, 1982, pages 2-8, B-43.
3. Decilog Terrain Analysis System, Summary of Video Field Data Acquisition Procedures, August 1984, Contract DAAK60-83-C-0036.
4. Cardozo, W. J., A Method for Spectral and Spatial Analyses of Natural Terrain for Camouflage Effectiveness, NRDEC Science Symposium Proceedings, Volume I, 2-4 June 1986, U. S. Army Natick Research, Development and Engineering Center, Natick, MA, NATICK/TR-86/050 (AD A179 101), pages 51-72.
5. Gold, Arthur A., J. Richard Goldgraben, C. Thomas Goldsmith and Nancy Monastero, Modifications to Improve Data Acquisition and Analysis for Camouflage Design, U. S. Army Natick Research and Development Laboratories, Natick, MA, January 1983 (NATICK/TR-83/011).
6. Dixon, Wilfrid J. and Frank J. Massey, Jr., Introduction to Statistical Analysis, 2nd ed., McGraw-Hill Book Co. Inc., New York, 1957, pages 390-399.
7. International Commission on Illumination (CIE), Recommendations on Uniform Color Spaces, Color-Difference Equations, Psychometric Color Terms, Supplement No. 2 to CIE Publication No. 15, (E-1.31) 1971,/(TC-1.3) 1978, Bureau Central de la CIE, Paris, 1978.
8. Simon, F. T. and J. A. Frost, A New Method for the Conversion of CIE Colorimetric Data to Munsell Notations, Color Res. Appl., 12, 256-260 (1987).
9. Billmeyer, Jr., F. W. and P. J. Alessi, Assessment of Color-Measuring Instruments for Objective Acceptability Judgement. NATICK/TR-79/044, U. S. Army Natick Research and Development Command, Natick, MA 01760, March 1979, AD A081 231, page 19.

References (continued)

10. Billmeyer, Jr., F. W. and P. J. Alessi, Assessment of Color-Measuring Instruments for Objective Acceptability Judgement. NATICK/TR-79/044, U. S. Army Natick Research and Development Command, Natick, MA 01760, March 1979, AD A081 231, pages 33, 111.

11. Ramsley, A. O., Selection of Standard Colors for the Woodland Camouflage Pattern, NATICK/TR-81/030, U.S. Army Natick Research and Development Laboratories, Natick, MA 01760, September 1981, AD B060 496L.

Appendix A - Beta 4 Values for the Scenes

<u>Domains, n</u>	<u>F_{0.90}</u>	<u>Scene #</u>				
		<u>705</u>	<u>760</u>	<u>765</u>	<u>780</u>	<u>785</u>
2	39.90		2.17o	2.12o		3.91o
3	9.00	1.39o	2.77o	2.61o	4.46o	6.60o
4	5.39	1.90o	4.31o	2.95o	5.57o	8.12o
5	4.11	2.24o	5.28o	3.55o	7.82o	9.71o
6	3.45	2.47o		4.86o		
7	3.05	2.99o		9.53x		
8	2.78	3.26o		9.32x		
9	2.59					
10	2.44					

<u>Domains, n</u>	<u>F_{0.90}</u>	<u>Scene #</u>				
		<u>790</u>	<u>795</u>	<u>800</u>	<u>825</u>	<u>830</u>
2	39.90	1.64o	1.31o	0.87o	1.71o	2.68o
3	9.00	2.12o	2.46o	1.66o	2.02o	5.50o
4	5.39	3.06o	4.19o	2.13o	2.35o	12.03o
5	4.11	3.72o	4.93o	2.42o	3.03o	
6	3.45	4.90o	6.85x	2.44o	3.37o	
7	3.05	10.92x	6.22x	2.80o	3.79o	
8	2.78			2.99o		
9	2.59			3.64x		
10	2.44					

<u>Domains, n</u>	<u>F_{0.90}</u>	<u>Scene #</u>				
		<u>835</u>	<u>840</u>	<u>843</u>	<u>845</u>	<u>850</u>
2	39.90		1.71o	1.42o		
3	9.00	2.80o	2.50o	1.63o	1.80o	2.51o
4	5.39	3.72o	3.02o	2.29o	2.16o	3.52o
5	4.11	4.52o	3.78o	2.72o	2.82o	3.93o
6	3.45	7.26x	4.32o	3.22o	3.39o	4.25o
7	3.05	9.24x		3.74o	3.71o	7.98x
8	2.78			4.92x	5.96x	9.27x
9	2.59					
10	2.44					

**NOTE: o denotes values of Beta 4 after optimization, x denotes values without optimization.

Appendix B - Optimum Number of Domains for each Scene

<u>Scene #</u>	<u>Domains, n</u>	<u>L*</u>	<u>a*</u>	<u>b*</u>	<u>% of scene</u>
705	8	43.41	11.55	20.15	7.0
		45.67	-0.07	12.26	7.7
		50.30	8.91	11.06	10.8
		65.62	2.28	10.74	12.0
		65.65	11.18	13.68	20.3
		57.59	9.94	17.31	19.2
		57.27	20.10	17.37	11.2
		55.82	-0.37	12.92	11.8
760	5	52.13	-0.09	11.41	19.2
		61.01	1.19	14.92	6.4
		57.30	2.28	14.35	17.6
		54.23	2.65	13.56	29.7
		51.50	1.98	12.91	27.1
765	6	40.15	-0.27	6.36	11.9
		30.90	0.04	1.93	11.0
		35.96	0.12	3.63	22.1
		37.13	-0.08	7.01	26.4
		32.61	-0.64	6.66	18.3
		27.06	-0.72	5.57	10.3
780	4	74.92	2.63	23.08	5.0
		81.24	1.79	27.27	5.0
		86.11	-1.57	24.29	84.3
		78.40	-1.15	19.91	5.7
785	4	82.87	-0.21	20.79	25.8
		84.80	0.48	22.03	28.2
		80.90	-0.78	19.92	27.5
		78.78	-1.58	18.91	18.5
790	6	66.10	6.08	39.50	19.5
		64.39	6.03	39.46	13.3
		63.87	6.18	40.95	16.4
		67.63	6.41	41.00	22.3
		65.18	5.93	41.03	26.6
		62.48	5.98	38.26	1.9
795	5	37.66	8.07	11.07	8.0
		65.11	6.82	15.47	25.9
		77.79	3.58	9.83	11.7
		55.91	8.42	15.40	31.6
		47.79	8.17	13.29	22.9
800	8	47.43	8.23	13.48	12.5
		49.88	8.97	13.29	9.4
		46.24	6.11	13.74	12.9
		47.01	6.32	10.68	12.6
		47.27	8.26	10.62	13.3
		48.75	6.21	13.07	15.4
		48.53	10.89	16.21	4.5
		49.34	7.31	11.26	19.4

Appendix B (continued) - Optimum Number of Domains for each Scene

Scene #	Domains, n	L*	a*	b*	% of scene
825	7	64.23	-7.04	12.30	10.6
		75.46	-4.83	11.39	14.7
		56.58	8.92	-0.82	8.9
		68.20	1.10	5.53	20.3
		71.09	9.68	-0.42	12.5
		51.43	-0.38	7.97	10.0
		79.47	1.18	7.17	23.0
830	4	75.49	0.20	9.36	22.1
		95.81	-0.34	8.12	1.8
		64.64	0.93	8.87	40.4
		48.28	2.80	8.02	35.7
835	5	30.41	13.32	-0.21	21.2
		11.10	22.63	-8.87	11.5
		28.53	0.29	9.00	18.5
		8.04	8.93	-0.35	16.8
		44.49	7.57	5.82	32.0
840	6	49.26	17.84	22.57	11.6
		70.92	8.71	13.35	12.0
		56.06	13.35	17.13	19.6
		43.49	13.66	16.28	9.4
		59.64	18.88	24.34	13.1
		64.77	11.20	19.28	34.3
843	7	45.06	20.76	30.90	11.2
		60.89	12.82	22.96	16.5
		65.60	12.31	12.40	9.1
		68.66	4.55	20.72	8.1
		44.92	17.61	20.83	16.7
		54.02	16.22	14.87	16.0
		55.86	20.41	26.30	22.4
845	7	23.08	12.54	30.31	10.6
		14.40	10.34	11.33	9.6
		37.96	1.07	11.22	11.1
		15.56	2.66	-0.12	9.8
		31.62	6.83	18.58	15.6
		20.11	9.40	19.45	13.7
		27.20	6.01	5.04	29.6
850	6	39.67	0.47	8.91	9.8
		41.96	1.46	18.97	8.5
		13.86	3.15	13.73	15.6
		30.66	3.91	15.73	24.7
		39.97	3.24	27.74	10.3
		24.39	3.54	8.99	31.0

Appendix C - Munsell Color Notations for Scenes

<u>Scene #</u>	<u>Domain</u>	<u>Munsell Notation</u>
705	1	6.56YR 4.21/3.70
	2	4.68Y 4.43/1.75
	3	4.03YR 4.88/2.48
	4	0.53Y 6.39/1.68
	5	3.10YR 6.40/3.24
	6	6.03YR 5.59/3.40
	7	0.13YR 5.56/4.99
	8	4.57Y 5.42/1.83
760	1	4.40Y 5.05/1.66
	2	2.90Y 5.93/2.16
	3	1.89Y 5.56/2.16
	4	1.49Y 5.26/2.09
	5	2.15Y 4.99/1.96
765	1	5.61Y 3.90/0.93
	2	4.98Y 3.01/0.34
	3	4.52Y 3.50/0.57
	4	5.09Y 3.61/1.05
	5	6.84Y 3.18/1.04
	6	7.50Y 2.64/0.93
780	1	1.98Y 7.34/3.42
	2	2.42Y 7.99/3.99
	3	4.46Y 8.49/3.26
	4	4.59Y 7.70/2.73
785	1	3.64Y 8.16/2.87
	2	5.06BG 8.36/14.04
	3	4.17Y 7.95/2.74
	4	5.03Y 7.74/2.56
790	1	1.86Y 6.44/5.93
	2	1.87Y 6.30/5.91
	3	1.92Y 6.22/6.11
	4	1.80Y 6.60/6.17
	5	2.04Y 6.35/6.12
	6	1.82Y 6.08/5.72
795	1	5.52YR 3.66/2.18
	2	7.84YR 6.34/2.78
	3	7.99YR 7.63/1.76
	4	6.71YR 5.43/2.95
	5	6.33YR 4.63/2.57
800	1	6.37YR 4.60/2.59
	2	5.32YR 4.84/2.72
	3	8.66YR 4.48/2.35
	4	6.70YR 4.56/2.03
	5	4.42YR 4.58/2.28
	6	8.06YR 4.73/2.33
	7	5.12YR 4.70/3.30
	8	5.85YR 4.78/2.26

Appendix C (continued) - Munsell Notations for Scenes

<u>Scene #</u>	<u>Domain</u>	<u>Munsell Notation</u>
825	1	5.01GY 6.25/1.93
	2	2.82GY 7.39/1.58
	3	5.61RP 5.49/2.21
	4	0.83Y 6.65/0.89
	5	6.17RP 6.95/2.62
	6	4.98Y 4.99/1.16
	7	0.65Y 7.81/1.13
830	1	2.92Y 7.40/1.33
	2	2.40YR 9.48/1.03
	3	2.10Y 6.30/1.32
	4	9.62YR 4.68/1.34
835	1	7.99RP 2.96/2.37
	2	6.55R 1.05/****
	3	4.75Y 2.78/1.45
	4	4.72GY 0.76/2.22
	5	0.76YR 4.31/1.71
840	1	3.56YR 4.78/4.96
	2	4.81YR 6.93/2.84
	3	3.63YR 5.44/3.86
	4	3.66YR 4.22/3.56
	5	3.27YR 5.80/5.46
	6	5.62YR 6.31/3.84
843	1	4.61YR 4.37/6.24
	2	6.10YR 5.92/4.45
	3	1.51YR 6.39/3.31
	4	0.47Y 6.70/3.24
	5	3.42YR 4.35/4.62
	6	1.01YR 5.24/4.06
	7	3.36YR 5.42/5.83
845	1	8.08YR 2.25/5.12
	2	5.65R 1.38/****
	3	3.36Y 3.69/1.66
	4	7.27BG 1.49/0.39
	5	9.82YR 3.08/3.17
	6	8.92YR 1.96/3.56
	7	2.82YR 2.66/1.30
850	1	4.00Y 3.85/1.30
	2	3.98Y 4.07/2.72
	3	7.46R 1.33/****
	4	1.72Y 2.99/2.58
	5	3.54Y 3.88/4.02
	6	10.00YR 2.38/1.61